
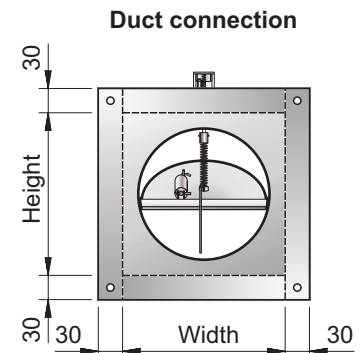

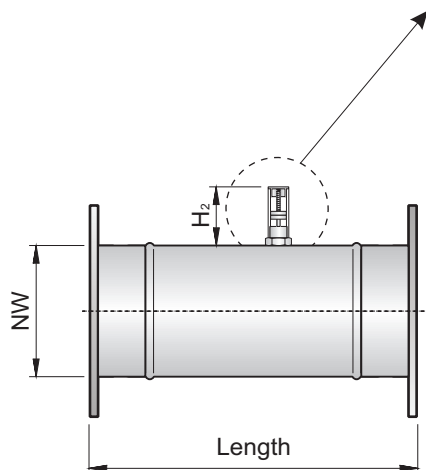


No. of ord. 540

# Constant volume flow controller selfregulating, rectangular/round

| Width | Height | NW   | Length<br>± 3 mm | H <sub>2</sub> | Volume flow ranges  |                     | Price<br>gross | Isolation shell |
|-------|--------|------|------------------|----------------|---------------------|---------------------|----------------|-----------------|
|       |        |      |                  |                | VRK 233             | VRK 232-N           |                | Add. Price      |
| [mm]  | [mm]   | [mm] | [mm]             | [mm]           | [m <sup>3</sup> /h] | [m <sup>3</sup> /h] |                |                 |
| 100   | 100    | 80   | 216              | 70             | 40 - 125            | 25 - 80             | 106,00 €       | 102,00 €        |
|       |        | 100  | 251              |                | 70 - 220            | 40-125              |                |                 |
| 125   | 125    | 80   | 216              |                | 40 - 125            | 25 - 80             | 106,00 €       |                 |
|       |        | 100  | 251              |                | 70 - 220            | 40-125              |                |                 |
|       |        | 125  | 251              |                | 100 - 280           | 65 - 220            |                |                 |
| 150   | 100    | 80   | 216              |                | 40 - 125            | 25 - 80             | 107,00 €       |                 |
|       |        | 100  | 251              |                | 70 - 220            | 40-125              |                |                 |
| 150   | 150    | 80   | 216              |                | 40 - 125            | 25 - 80             | 108,00 €       |                 |
|       |        | 100  | 251              |                | 70 - 220            | 40-125              |                |                 |
|       |        | 125  | 251              |                | 100 - 280           | 65 - 220            |                |                 |

Other informations, such as pressure loss, you can find in our brochures for VRK 233 and/or VRK 232-N

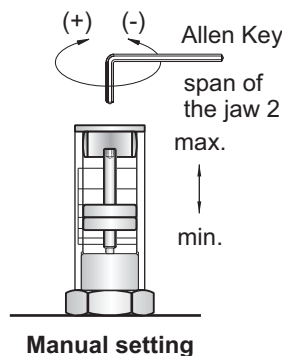

The controller VRRK-N consists of a round constant volume flow controller with connection frames on both sides made of galvanized steel.

This model (adapter controller) allows to adjust the volume flows lower than 200 m<sup>3</sup>/h in rectangular ducts.



Aerotechnik E. Siegwart GmbH  
Untere Hofwiesen • D-66299 Friedrichsthal  
☎ + 49 (0) 6897/859-0 • 📠 +49 (0) 6897/859-150  
www.aerotechnik.de • info@aerotechnik.de